

Technical data sheet

Seal 106

Item number: 2023644



With metric connecting thread to IEC 423, robust cap-nut cable gland with large sealing area. Strain relief, torsion protection and tightness over the whole clamping area. Sealing ring made of polychloroprene/acrylonitrile butadiene rubber. Moulded shaped sealing lip on intermediate support, thus no connection thread sealing ring required, VDE-tested to DIN EN 50262, . Temperature range $-20\text{ }^{\circ}\text{C}$ to $+65\text{ }^{\circ}\text{C}$.



CR/NBR Rubber mixture

Master data

Item number	2023644
Type	106 Z DI PG16
Description 1	Sealing ring
Description 2	to screwed cable gland 106/Z
Manufacturer	OBO
Dimension	PG16
Material	Rubber mixture
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.205 kg
Weight unit	kg/100 pc.


Technical data sheet

Seal 106

Item number: 2023644



Dimensions

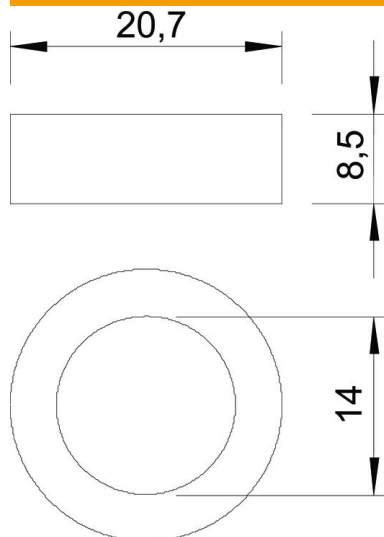

Dimension D	14 mm
Dimension D1	14 mm
Dimension D2	20.7 mm
Dimension H	8.5 mm

Technical data

Sealing area D, max.	14 mm
Sealing area D, min.	10 mm
Screw for PG thread dimension	16
Halogen-free	no
Permitted temperature range, max.	65 °C
Permitted temperature range, min.	-20 °C