Technical data sheet

Sprint screw, with Philips screw

Item number: 3195694



Hardened steel, electrogalvanised and Hostaflon-coated. Pan head with combined Phillips and slotted head (Pozidriv size 2 except Ø 6 mm Pozidriv size 3).

The use of Sprint screws leads to considerably reduced screw-in times compared with standard screws. This noticeable advantage comes from the point with the first thread, which leads on to the double thread beyond.

Areas of use: wood, chipboard, Rigips panels, plastic anchors.





St

Steel

G

Electrogalvanized

Master data


| Item number | 3195694 | |
|---------------------|----------------------------|--|
| Туре | 4758 5.0x60 | |
| Description 1 | Sprint screw | |
| Description 2 | panhead, +/- slot drive | |
| Manufacturer | OBO | |
| Dimension | 5x60mm | |
| Material | Steel | |
| Surface | Electrogalvanized | |
| Surface standard | EN ISO 19598 / EN ISO 4042 | |
| Smallest sales unit | 200 | |
| Unit of quantity | Piece | |
| Weight | 0.585 kg | |
| Weight unit | kg/100 pc. | |

Technical data sheet

Sprint screw, with Philips screw





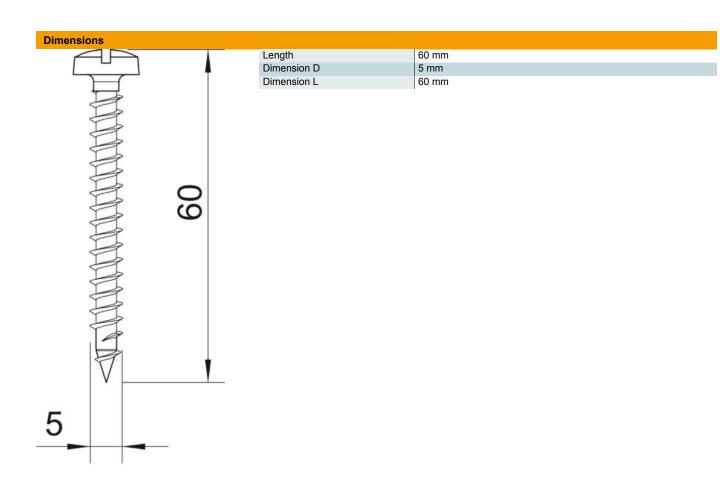



| Technical data | | |
|----------------|-----------------|------------------|
| | Hardened | yes |
| | Head diameter | 9.5 mm |
| | Head shape | Panhead |
| | Screw system | Combination slot |
| | Two-compartment | yes |