

# Technical data sheet

## Flat conductor, galvanised steel for foundation earthing

Item number: 5020808



- Zinc coating: 225 g/m<sup>2</sup> (approx. 30 µm)
- Can be used as an earthing conductor
- For foundation earthing, not routed in the ground



<b>St</b>	Steel
<b>FT</b>	Hot-dip galvanised

### Master data

Item number	5020808
Type	5052 30X3
Description 1	Steel strip
Description 2	30 m ring
Manufacturer	OBO
Dimension	30x3mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	30
Unit of quantity	Metre
Weight	70.65 kg
Weight unit	kg/100 m


# Technical data sheet

## Flat conductor, galvanised steel for foundation earthing

Item number: 5020808



### Dimensions

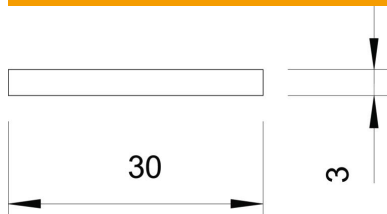

Width	30 mm
Height	3 mm
Dimension B	30 mm
Dimension H	3 mm

### Technical data

Normal ring (ca. kg)	21
Normal ring (approx. m)	30
Length tolerance $\pm$	5 %
Cross-section	90 mm <sup>2</sup>