

# Technical data sheet

## Multipurpose anchor

Item number: 2348120



Also suitable as a cavity anchor, with collar to prevent slipping. 3 tabs take up the torque.

Required minimum screw length = anchor length + component thickness + 1 x screw Ø.

Withdrawal force applies to wood screws of the largest bolt diameter in concrete of class B25.

Our safety value recommendation: 5x




PA Polyamide

### Master data

Item number	2348120
Type	910 AZK 5x31
Description 1	All-purpose anchor
Available from	01.05.2020
Manufacturer	OBO
Dimension	5x31
Colour	Light grey
Material	Polyamide
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.036 kg
Weight unit	kg/100 pc.

### Dimensions

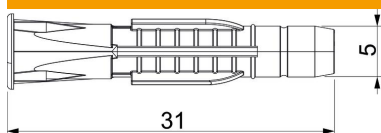

Length	30 mm
Dimension D	5 mm
Dimension L	31 mm

# Technical data sheet

## Multipurpose anchor

Item number: 2348120



### Technical data

Version for	Universal anchor
Concrete Frat	160
Drill hole diameter, min.	5 mm
Suitable for fastening with cable ties	no
Suitable for gas concrete	no
Suitable for screw diameter, max.	4 mm
Suitable for hexagonal wood screw	yes
Plasterboard 12.5 mm Fempf.	70
Hollow brick Hlz12 Frat	210
Wood screws	3-4
Porous calcareous sandstone KSL12 Fempf.	170
Solid calcareous sandstone KSL12 Frat	170
With edge	yes
With bolts	no
Porous concrete P2 Fempf.	30
Full brick Mz12 Frat	160