

Technical data sheet

Support bracket AS 15

Item number: 6421490



Light-duty support bracket for infinitely adjustable fastening on IS 8 support. The support bracket can be fastened to both sides of the I support.

The necessary clamping lug (item no. 6419015), including bolt and nut can be ordered individually for bracket widths 110–160 mm.



St

Steel

FT

Hot-dip galvanised

Master data

| | |
|---------------------|--------------------|
| Item number | 6421490 |
| Type | AS 15 61 FT |
| Description 1 | Support bracket |
| Description 2 | for IS 8 support |
| Manufacturer | OBO |
| Dimension | B610mm |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 87.1 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Support bracket AS 15

Item number: 6421490



Dimensions

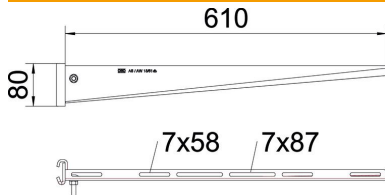


| | |
|-------------|--------|
| Length | 610 mm |
| Width | 610 mm |
| Height | 80 mm |
| Dimension B | 610 mm |
| Dimension H | 80 mm |
| Dimension L | 610 mm |

Technical data

| | |
|-------------------------------|-----------------|
| Version for | Support bracket |
| EPD article | yes |
| F in kN | 1.5 kN |
| Maintain electrical functions | no |
| Rustproof steel, pickled | no |

Loads

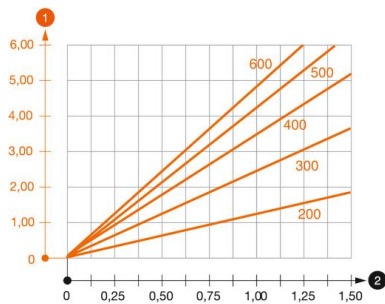

Load diagram, bracket type AS 15

- 1 Bending of the bracket tip at permitted bracket load
- 2 Permitted bracket load in kN without man load
- 2 Support width in m
- Load curve with bracket lengths in mm