

# Technical data sheet

End piece Signa Base ES 70170

Item number: 6132781



End piece as a fitting for the Signa Base device installation trunking.  
For a clean end to the trunking system.



**PC/ABS** Polycarbonate/Acrylnitrile-butadiene-styrene

## Master data

|                     |  |
|---------------------|--|
| Item number         | 6132781                                      |
| Type                | BRK ES70170 rws                              |
| Description 1       | End piece                                    |
| Description 2       | SIGNA BASE 70x170 9010                       |
| Manufacturer        | OBO  |
| Dimension           | 34x180x73                                    |
| Colour              | Pure white; RAL 9010                         |
| Material            | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 1  |
| Unit of quantity    | Piece  |
| Weight              | 6.62 kg                                      |
| Weight unit         | kg/100 pc.                                   |


# Technical data sheet

End piece Signa Base ES 70170


Item number: 6132781



## Dimensions

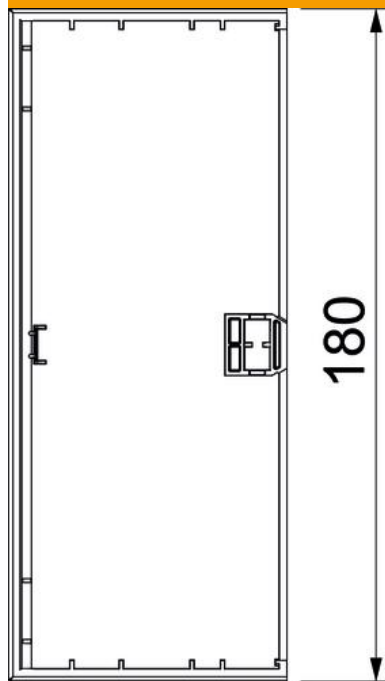

|        |        |
|--------|--------|
| Length | 34 mm  |
| Width  | 180 mm |
| Height | 73 mm  |

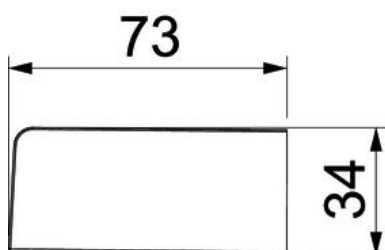

## Technical data

|                           |             |
|---------------------------|-------------|
| Version for               | Symmetrical |
| Fastening type            | Lockable    |
| for duct width            | 170 mm      |
| for trunking height       | 70 mm       |
| Suitable for              | Left/right  |
| Halogen-free              | yes         |
| Cut lamination            | yes         |
| Protection rating         | IP40        |
| Protective film           | no          |
| Protection rating IK code | IK07.       |

# Technical data sheet

End piece Signa Base ES 70170

Item number: 6132781



## Technical data

|                                      |       |
|--------------------------------------|-------|
| Permitted temperature range,<br>max. | 60 °C |
| Permitted temperature range,<br>min. | -5 °C |