Technical data sheet

Data technology support, 1 module, straight outlet, type A



Item number: 6119204



Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type A has a mounting opening of 20.10 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

the data connection modules in the mounting opening. The type A data technology support is suitable for accepting the following data connection modules: AMP TYCO (without dust protection cap): SL Series 110Connect and SL Series Tooless; Brand-Rex: modules with item numbers ending in ...JAKS000CR and ...JAKU002; Nexans: LANmark RJ45 with blue adapter clip, LANmark GG45 with metal clip.

For installation in Rapid 45 and Rapid 80 device installation trunking, ISS service poles and underfloor systems.

PC

Polycarbonate

Master data


| Item number | 6119204 |
|---------------------|--------------------------------|
| Type | DTG-2A SWGR1 |
| Description 1 | Data technology support |
| Description 2 | f. 2 connection modules type A |
| Manufacturer | OBO |
| Dimension | 45x45mm |
| Colour | Black-grey; RAL 7021 |
| Material | Polycarbonate |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 1.1 kg |
| Weight unit | kg/100 pc. |

Technical data sheet

Data technology support, 1 module, straight outlet, type A



Item number: 6119204

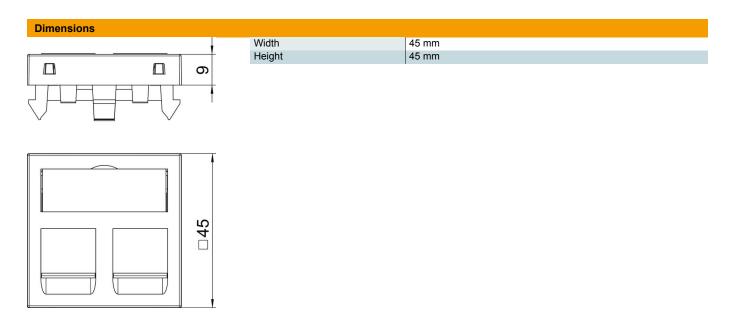

Technical data

| Surface version | Matt |
|----------------------|--|
| Fastening type | Lock |
| Labelling panel | With labelling panel |
| Halogen-free | yes |
| Hinged cover | no |
| Lamp-wire connector | no |
| With printed label | no |
| With dust protection | yes |
| Mounting opening | Type A |
| Protection rating | IP20 |
| Depth | 9 mm |
| Support ring | no |
| Transparent | no |
| Use | Installable data connector |
| Strain relief option | no |
| Combination | Basic element with central cover plate |