Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type GA-53130

Item number: 6112530





 90° aluminium flat angle for direction change of Rapid 45-2 GA... device installation trunking.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by permitted scatter due to the material and process conditions cannot be avoided (according to DIN 17 611). 45 mm devices can be clicked in directly. When using PC/ABS hood fittings, there may be colour differences due to the different materials.





Aluminium

Master data


Item number 6112530 Type GA-FS53130RW Description 1 Flat angle Description 2 Aluminium, rigid form Manufacturer OBO Dimension 53x130x225 Colour Pure white; RAL 9010 Material Aluminium Smallest sales unit 1
Description 1 Flat angle Description 2 Aluminium, rigid form Manufacturer OBO Dimension 53x130x225 Colour Pure white; RAL 9010 Material Aluminium
Description 2 Aluminium, rigid form Manufacturer OBO Dimension 53x130x225 Colour Pure white; RAL 9010 Material Aluminium
Manufacturer OBO Dimension 53x130x225 Colour Pure white; RAL 9010 Material Aluminium
Dimension 53x130x225 Colour Pure white; RAL 9010 Material Aluminium
Colour Pure white; RAL 9010 Material Aluminium
Material Aluminium
Smallest sales unit 1
Unit of quantity Piece
Weight 119.9 kg
Weight unit kg/100 pc.

Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type GA-53130





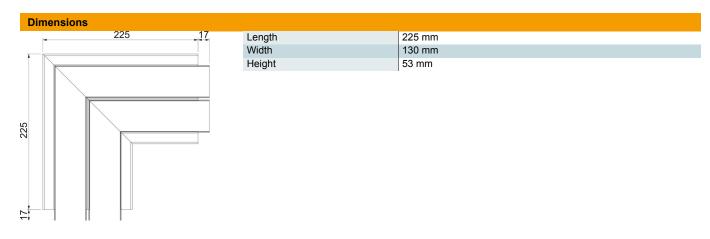

		ica		

Number of covers	2
Version for	Base and cover
for duct width	130 mm
for trunking height	53 mm
Halogen-free	yes
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	no
Cover width	45 mm
Cover width 2	45 mm
Change of direction	Vertical, rising/falling
Protection rating	IP30
Protective film	yes
Protection rating IK code	IK10
Symmetrical	yes
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-15 °C
Angle range, min.	90 mm