


Technical data sheet

GES9-3 service outlet in UGD350-3 9 with UT4 45

Item number: 7429512

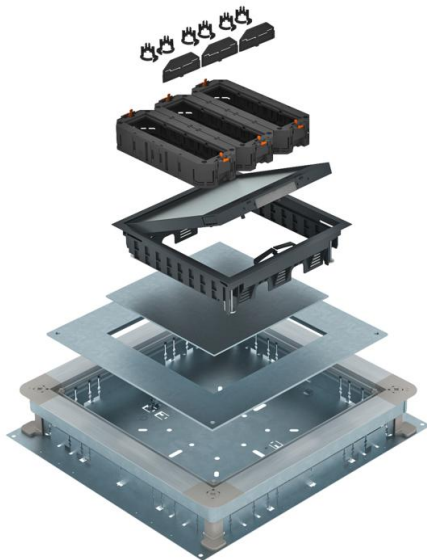

Service outlet with all necessary system accessories for installation in screed floors for indoor use.

The scope of delivery contains:

- Underfloor socket UGD350-3/9,
- Service outlet of nominal size 9 with universal fastening bracket,
- Three universal supports for Modul 45® devices.

Service outlet with carpet protection frame, hinged cover and cord outlet made of polyamide in the colour RAL 7011.

5 mm floor covering recess in the hinged cover (changeable to 3, 8 or 10 mm).



PA Polyamide

Master data

Item number	7429512
Type	GES9-3 KS 7011
Description 1	Service outlet construct. set
Description 2	for screed installation
Manufacturer	OBO
Colour	Iron grey; RAL 7011
Material	Polyamide
Smallest sales unit	1
Unit of quantity	Piece
Weight	1146.5 kg
Weight unit	kg/100 pc.

Technical data

Cable outlet version	Swivellable cord outlet
Floor care	Dry
Seal installation option	no
Screed height, max.	125 mm
Screed height, min.	75 mm
Suitable for raised floor installation	no

Technical data sheet

GES9-3 service outlet in UGD350-3 9 with UT4 45

Item number: 7429512



Technical data

Suitable for screed-flush closed underfloor ducts	no
Suitable for cavity floor installation	no
Suitable for wet care	no
Suitable for underfloor ducts	no
Frame version	Carpet protection frame
Protection rating (IP) when used	IP20
Protection rating (IP) when unused	IP40
Protection rating IK code	IK08
Opening mechanism	Locking slider
Floor covering thickness	5 mm