

Technical data sheet

Service outlet, square, for screed height 55 mm

Item number: 7405039



GES9 service outlet with a fixed construction height of 55 mm for use in installation trunking systems in dry rooms with dry-care floors in interior areas. With two installation housings for vertical mounting of Modul 45 devices and four strain reliefs. Two installation frames are required to mount Modul 45 devices.

The data modules are mounted using a maximum of two optional MPMT45 mounting plates.

The service outlet is equipped with universal fastening brackets.



PA Polyamide

Master data

| | |
|---------------------|--------------------------|
| Item number | 7405039 |
| Type | GES9 55U V 9011 |
| Description 1 | Service outlet |
| Description 2 | for duct mounting |
| Manufacturer | OBO |
| Dimension | 263x263x59 |
| Colour | Graphite black; RAL 9011 |
| Material | Polyamide |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 206.7 kg |
| Weight unit | kg/100 pc. |



Technical data sheet

Service outlet, square, for screed height 55 mm

Item number: 7405039



Dimensions

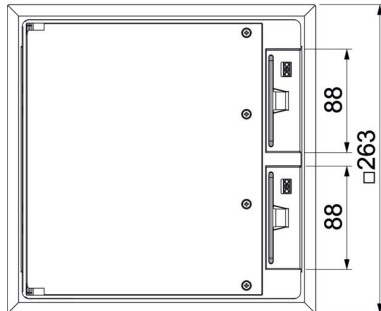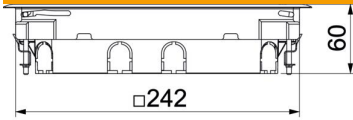

| | |
|-------------|--------|
| Length | 263 mm |
| Width | 263 mm |
| Height | 59 mm |
| Dimension h | 55 mm |

Technical data

| | |
|---|-------------------------|
| Number of installable devices | 8 |
| Version for | Square |
| Cable outlet version | Swivellable cord outlet |
| Floor covering protection frame | yes |
| Floor care | Dry |
| Seal installation option | no |
| Screed height, min. | 55 mm |
| Floor height, min. | 58 mm |
| Suitable for raised floor installation | yes |
| Suitable for screed-flush closed underfloor ducts | yes |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for cavity floor installation | yes |
| Suitable for wet care | no |
| Suitable for underfloor ducts | yes |
| Device support to accept mounting boxes | no |
| Length of external dimensions | 263 mm |
| Length of installation dimensions | 242 mm |
| With floor covering recess | no |
| Nominal size for device installation units | 9 |
| Frame version | Carpet protection frame |
| Heavy-duty version | no |
| Vertical load, large area | to 5,000 N |
| Vertical load, small area | to 3,000 N |
| Opening mechanism | Handle |
| Floor covering thickness | 5 mm |