


Technical data sheet

Internal corner, for device installation trunking Rapid 80 type GK-70170

Item number: 6274740



Internal corner for changing the direction of the GK device installation trunking.

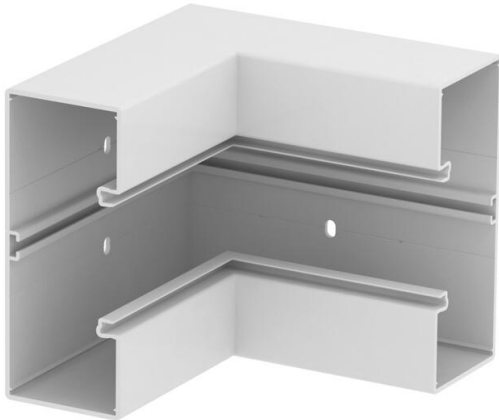


PVC Polyvinylchloride

Master data

| | |
|---------------------|----------------------|
| Item number | 6274740 |
| Type | GK-I70170RW |
| Description 1 | Internal corner |
| Manufacturer | OBO |
| Dimension | 70x170mm |
| Colour | Pure white; RAL 9010 |
| Material | Polyvinylchloride |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 130 kg |
| Weight unit | kg/100 pc. |

Dimensions

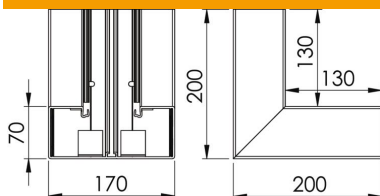

| | |
|--------|--------|
| Length | 200 mm |
| Width | 170 mm |
| Height | 70 mm |

Technical data sheet

Internal corner, for device installation trunking Rapid 80 type GK-70170

Item number: 6274740



Technical data

| | |
|-----------------------------------|-------------|
| Number of covers | 1 |
| Version for | Base |
| Shape | Symmetrical |
| Halogen-free | no |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | yes |
| Cover width | 76.5 mm |
| Cover width 2 | 0 mm |
| Cover width 3 | 0 mm |
| Protection rating | IP30 |
| Protective film | yes |
| Protection rating IK code | IK08 |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -15 °C |
| Angle range, max. | 90 mm |
| Angle range, min. | 90 mm |