## **Technical data sheet**

## **IS 8 support**

**Item number: 6361293** 





I support with welded head plate. For fastening to horizontal concrete ceilings and steel girders.

Single and double-sided brackets of type AS 15, AS 30 and AS 55 can be fastened to the IS 8 K suspended support. The height of the brackets is infinitely ad-



Steel



Hot-dip galvanised


## Master data

Item number	6361293
Туре	IS 8 K 140 FT
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	80x42x1400
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	1
Unit of quantity	Piece
Weight	901.8 kg
Weight unit	kg/100 pc.


## Technical data sheet IS 8 support





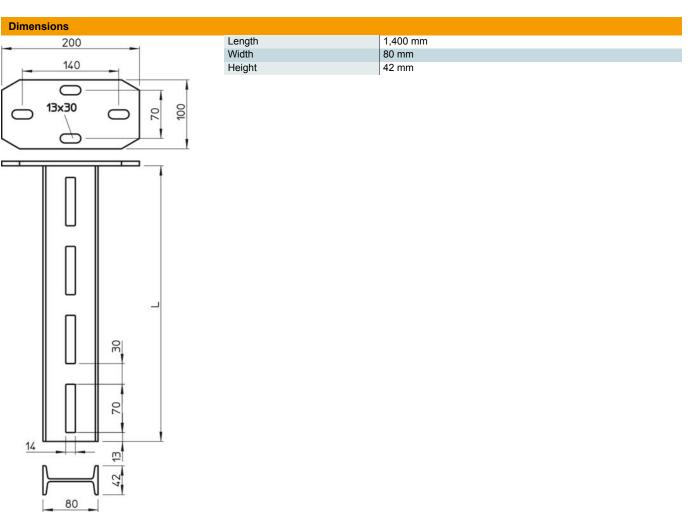

Version for	I profile
Bracket length 200	9.6 kN
Bracket length 400	7 kN
Bracket length 600	5 kN
Maintain electrical functions	no
Hole width	14 mm
Material thickness	4 mm
Maximum tensile load	12 kN
With toothing	no
Slot width	70 mm



Chara

Max. tota = 10 cm of ETA(a

Technical data