## **Technical data sheet**

## **IS 8 support**

**Item number: 6361315** 





I support with welded head plate. For fastening to horizontal concrete ceilings and steel girders.

Single and double-sided brackets of type AS 15, AS 30 and AS 55 can be fastened to the IS 8 K suspended support. The height of the brackets is infinitely ad-



Steel

Hot-dip galvanised

## Master data


| Item number         | 6361315                |
|---------------------|------------------------|
| Туре                | IS 8 K 150 FT          |
| Description 1       | Support                |
| Description 2       | with welded head plate |
| Manufacturer        | OBO                    |
| Dimension           | 80x42x1500             |
| Material            | Steel                  |
| Surface             | Hot-dip galvanised     |
| Surface standard    | DIN EN ISO 1461        |
| Smallest sales unit | 1                      |
| Unit of quantity    | Piece                  |
| Weight              | 959.8 kg               |
| Weight unit         | kg/100 pc.             |
|                     |                        |

## **Technical data sheet** IS 8 support





Loads

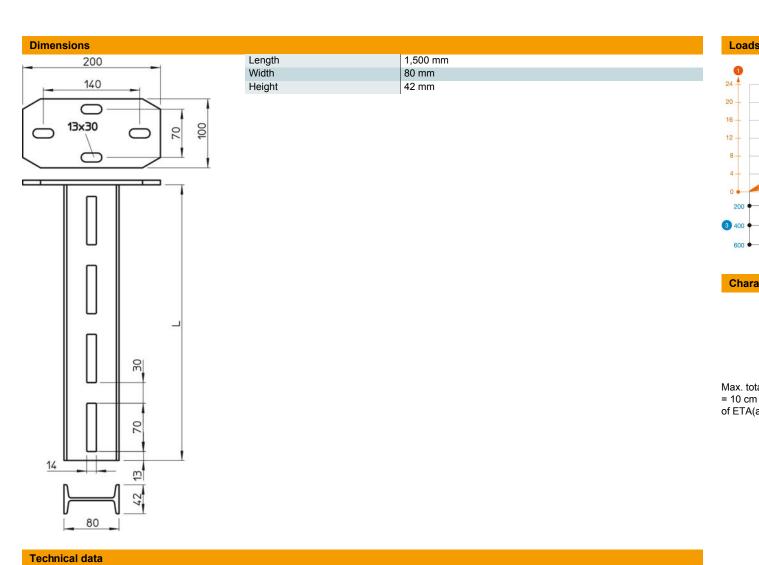

| Version for                   | I profile |
|-------------------------------|-----------|
| Bracket length 200            | 9.6 kN    |
| Bracket length 400            | 7 kN      |
| Bracket length 600            | 5 kN      |
| Maintain electrical functions | no        |
| Hole width                    | 14 mm     |
| Material thickness            | 4 mm      |
| Maximum tensile load          | 12 kN     |
| With toothing                 | no        |
| Slot width                    | 70 mm     |