

Technical data sheet

IS 8 support

Item number: 6361153



I support with welded head plate. For fastening to horizontal concrete ceilings and steel girders.
Single and double-sided brackets of type AS 15, AS 30 and AS 55 can be fastened to the IS 8 K suspended support. The height of the brackets is infinitely adjustable.



- St** Steel
- FT** Hot-dip galvanised

Master data

Item number	6361153
Type	IS 8 K 80 FT
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	80x42x800
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	1
Unit of quantity	Piece
Weight	553.9 kg
Weight unit	kg/100 pc.


Technical data sheet

IS 8 support

Item number: 6361153




Dimensions

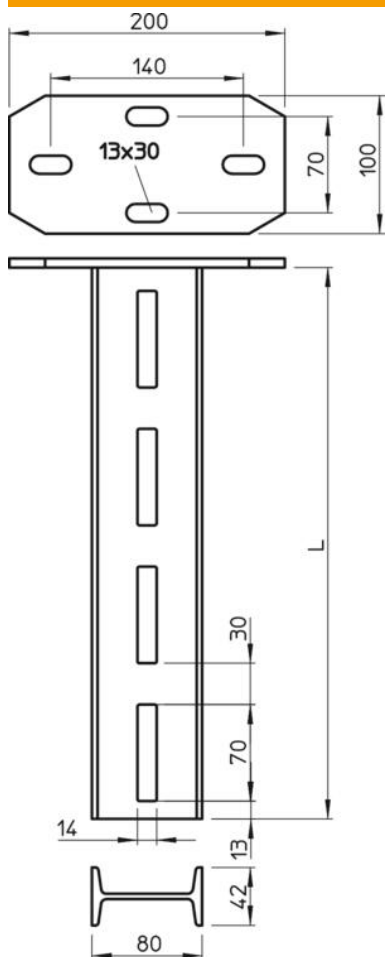

Length	800 mm
Width	80 mm
Height	42 mm

Loads



Chara

Max. tota
= 10 cm
of ETA(a

Technical data

Version for	I profile
Bracket length 200	9.6 kN
Bracket length 400	7 kN
Bracket length 600	5 kN
Maintain electrical functions	no
Hole width	14 mm
Material thickness	4 mm
Maximum tensile load	12 kN
With tothing	no
Slot width	70 mm