

Technical data sheet

Device installation trunking Rapid 80, trunking width 170, trunking height 70, symmetrical
Item no. 6279100



Device installation trunking without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

The cover must be ordered separately. We recommend the use of the trunking clamp.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).




Alu Aluminium

Master data

Item no.	6279100
Type	GA-S70170RW
Description 1	Device installation trunking
Description 2	symmetrical
Dimension	70x170x2000
Colour	Pure white
RAL number	9010
Material	Aluminium
Material symbol	Alu
Smallest sales unit (VG)	2 m
Weight	262,90 kg/100 m

Technical data

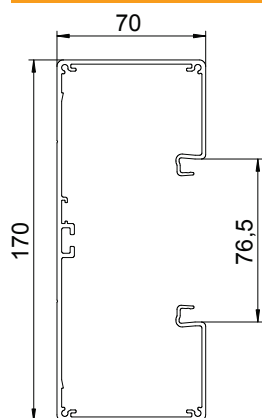

Length	2.000,00 mm
Width	170,00 mm
Height	70,00 mm
Number of covers	1
Number of insertable partitions	1
Rear panel version (inner side)	Continuous C profile
Rectangular shape	<input checked="" type="checkbox"/>
Base perforation	Without base perforation
Halogen-free	<input type="checkbox"/>
Cable retaining clip	<input type="checkbox"/>
Trunking height	70,00 mm
Duct connector	<input type="checkbox"/>
Cover mounting type	Internal
Mounting perforation in base	<input type="checkbox"/>
Usable cross-section	86,20 cm ²
Usable cross-section	8.620,00 mm ²
Cover width	76,5 mm
Cover width 2	0,00 mm
Cover width 3	0,00 mm
Cover supplied	<input type="checkbox"/>
Protective film	<input checked="" type="checkbox"/>

Technical data sheet

Device installation trunking Rapid 80, trunking width
170, trunking height 70, symmetrical
Item no. 6279100



Technical data

Symmetrical

