

# Technical data sheet

## LG 60 cable ladder, 3 m VSF FS

Item number: 6207519



Cable ladder for horizontal routing of cables. Can be used in the widths 200–400 mm as a standard support structure for the maintenance of electrical functionality according to DIN 4102 Part 12. Maintenance of electrical functionality classes E30 to E90. With riveted C profile rung, open in an upward direction.



E30 E60 E90

St Steel

FS Strip galvanized

### Master data

|                     |                              |
|---------------------|------------------------------|
| Item number         | 6207519                      |
| Type                | LG 630 VSF 3 FS              |
| Description 1       | Cable ladder function maint. |
| Description 2       | rungs distance 150 mm        |
| Manufacturer        | OBO                          |
| Dimension           | 60x300x3000                  |
| Material            | Steel                        |
| Surface             | Strip galvanized             |
| Surface standard    | DIN EN 10346                 |
| Smallest sales unit | 3                            |
| Unit of quantity    | Metre                        |
| Weight              | 355.666 kg                   |
| Weight unit         | kg/100 m                     |


# Technical data sheet

LG 60 cable ladder, 3 m VSF FS

Item number: 6207519



## Dimensions

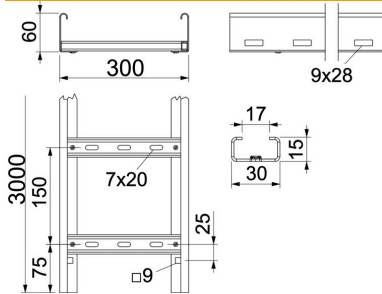

|                     |          |
|---------------------|----------|
| Length              | 3,000 mm |
| Length              | 3,000 ft |
| Width               | 300 mm   |
| Height              | 60 mm    |
| Dimension B         | 300 mm   |
| Rung slot dimension | 17.00    |

## Technical data

|                               |                       |
|-------------------------------|-----------------------|
| Version of the rungs          | Profile perforated    |
| Side rail version             | Profile (open)        |
| Fastening of rung             | Blind riveted         |
| Maintain electrical functions | yes                   |
| Usable cross-section          | 14800 mm <sup>2</sup> |
| Rustproof steel, pickled      | no                    |
| Side perforation              | yes                   |
| Rung distance                 | 150 mm                |
| Wide-span version             | no                    |
| Rail thickness                | 1.5 mm                |