

Technical data sheet

MS4141 mounting rail, slot 22 mm, FT, perforated

Item number: 1122606



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



St Steel

FT Hot-dip galvanised

Master data

| | |
|---------------------|-----------------------|
| Item number | 1122606 |
| Type | MS4141P1000FT |
| Description 1 | Profile rail |
| Description 2 | perforated, slot 22mm |
| Manufacturer | OBO |
| Dimension | 1000x41x41 |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 1 |
| Unit of quantity | Metre |
| Weight | 261.4 kg |
| Weight unit | kg/100 m |


Technical data sheet

MS4141 mounting rail, slot 22 mm, FT, perforated

Item number: 1122606



Dimensions

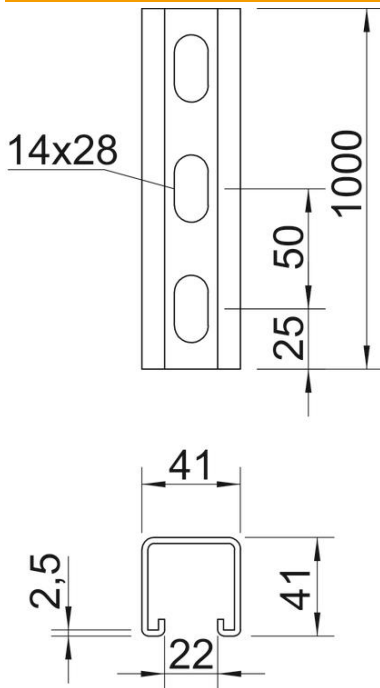

| | |
|-------------|----------|
| Length | 1,000 mm |
| Width | 41 mm |
| Height | 41 mm |
| Dimension L | 1,000 mm |

Technical data

| | |
|-------------------------------|----------------------|
| Breakable | no |
| Type of perforation | Perforated back |
| Version for | Single profile |
| Drill hole spacing, centre | 50 mm |
| Maintain electrical functions | no |
| Hole size | 14x28 mm |
| Material thickness | 2.5 mm |
| With perforation | yes |
| With tothing | yes |
| Profile shape | C profile |
| Slot width | 22 mm |
| Static value A | 2.97 cm ² |
| Static value Iy | 6.05 cm |
| Static value Iz | 9.01 cm |
| Static value Wy | 2.91 cm ² |
| Static value Wz | 4.4 cm ² |