
Technical data sheet

MSL4141 mounting rail, slot 22 mm, FS, perforated



Item number: 1123270







St

Steel

FS

Strip galvanized

Master data


Item number 1123270 Type MSL4141P0600FS Description 1 Profile rail Description 2 perforated, slot 22mm Manufacturer OBO Dimension 600x41x41 Material Steel Surface Strip galvanized Surface standard DIN EN 10346 Smallest sales unit 1 Unit of quantity Piece Weight 121 kg Weight unit kg/100 pc.		
Description 1 Profile rail Description 2 perforated, slot 22mm Manufacturer OBO Dimension 600x41x41 Material Steel Surface Strip galvanized Surface standard DIN EN 10346 Smallest sales unit 1 Unit of quantity Piece Weight 121 kg	Item number	1123270
Description 2 perforated, slot 22mm Manufacturer OBO Dimension 600x41x41 Material Steel Surface Strip galvanized Surface standard DIN EN 10346 Smallest sales unit 1 Unit of quantity Piece Weight 121 kg	Type	MSL4141P0600FS
Manufacturer OBO Dimension 600x41x41 Material Steel Surface Strip galvanized Surface standard DIN EN 10346 Smallest sales unit 1 Unit of quantity Piece Weight 121 kg	Description 1	Profile rail
Dimension 600x41x41 Material Steel Surface Strip galvanized Surface standard DIN EN 10346 Smallest sales unit 1 Unit of quantity Piece Weight 121 kg	Description 2	perforated, slot 22mm
Material Steel Surface Strip galvanized Surface standard DIN EN 10346 Smallest sales unit 1 Unit of quantity Piece Weight 121 kg	Manufacturer	OBO
Surface Strip galvanized Surface standard DIN EN 10346 Smallest sales unit 1 Unit of quantity Piece Weight 121 kg	Dimension	600x41x41
Surface standard DIN EN 10346 Smallest sales unit 1 Unit of quantity Piece Weight 121 kg	Material	Steel
Smallest sales unit 1 Unit of quantity Piece Weight 121 kg	Surface	Strip galvanized
Unit of quantity Piece Weight 121 kg	Surface standard	DIN EN 10346
Weight 121 kg	Smallest sales unit	1
	Unit of quantity	Piece
Weight unit kg/100 pc.	Weight	121 kg
	Weight unit	kg/100 pc.

Technical data sheet

MSL4141 mounting rail, slot 22 mm, FS, perforated



Item number: 1123270

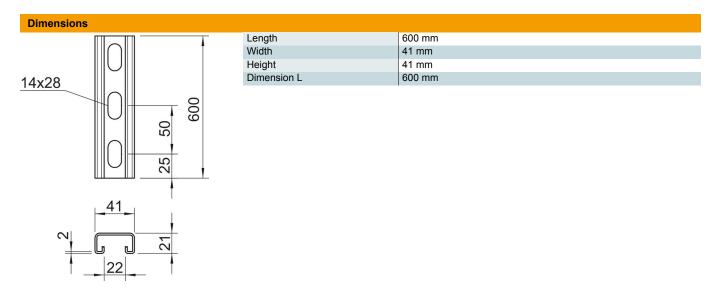

Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Maintain electrical functions	no
Material thickness	2 mm
With perforation	yes
With toothing	yes
Profile shape	C profile
Slot width	22 mm
Static value A	2.45 cm ²
Static value ly	5.18 cm
Static value Iz	7.56 cm
Static value Wy	2.51 cm ²
Static value Wz	2.69 cm ²