

# Technical data sheet

## OKB supply trunking

Item number: 7403811



Ready-to-mount trunking unit for cable routing, consisting of a trunking base with two covers and two adjustable floor covering contact profiles, for screed limitation in areas of door soffits and in front of radiator alcoves. The scope of delivery contains two lid butt seals and one connector.

For height adjustment, six height adjustment units are required.

Load capacity up to a maximum of 5 kN.



**St** Steel

**FS** Strip galvanized

### Master data

|                     |                          |
|---------------------|--------------------------|
| Item number         | 7403811                  |
| Type                | OKB E 25085 ON           |
| Description 1       | Flushfloor trunking unit |
| Description 2       | blank                    |
| Manufacturer        | OBO                      |
| Dimension           | 2000x73x85               |
| Material            | Steel                    |
| Surface             | Strip galvanized         |
| Surface standard    | DIN EN 10346             |
| Smallest sales unit | 2                        |
| Unit of quantity    | Metre                    |
| Weight              | 1320 kg                  |
| Weight unit         | kg/100 m                 |


# Technical data sheet

## OKB supply trunking

Item number: 7403811



### Dimensions

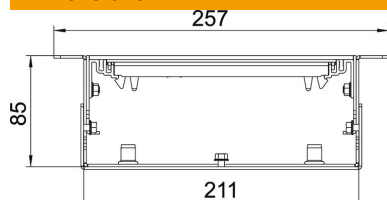

|             |          |
|-------------|----------|
| Length      | 2,000 mm |
| Width       | 210 mm   |
| Height      | 93 mm    |
| Dimension h | 85 mm    |

### Technical data

|  |                       |
|--|-----------------------|
| Mounting opening cover                 | no                    |
| Number of compartments                 | 1 St.                 |
| Floor plate                            | yes                   |
| Floor care                             | Dry                   |
| Cover fastening, locking               | no                    |
| Seal installation option               | no                    |
| Installation opening for on-floor tank | no                    |
| Decouplable                            | yes                   |
| Suitable for expansion joint           | no                    |
| Mesh wall                              | no                    |
| Minimum screed height                  | 85                    |
| With connection opening                | no                    |
| With equipotential bonding             | no                    |
| With separating retainer               | no                    |
| With overhang                          | yes                   |
| Mounting opening                       | Without               |
| Height-adjustment range, min.          | 0 mm                  |
| Usable cross-section                   | 11000 mm <sup>2</sup> |
| Removable cover                        | yes                   |
| Cross-section, draw a                  | 11008 mm <sup>2</sup> |
| Separating retainer fastening          | stecken               |
| Vertical load, large area              | to 5,000 N            |
| Vertical load, small area              | to 3,000 N            |
| Separating retainer fastening          | Plug                  |