

Technical data sheet

Porous concrete anchor with M12 internal thread

Item number: 3497706



Steel spreading anchor tested for fire protection properties and approved for use in porous concrete.

Version with internal thread. Suitable for fire loads of up to 120 minutes, please refer to the general construction approval for the load values (applies to porous concrete of resistance classes of min. 3.3).

A setting tool is required for mounting.



DIBt U


St Steel

G Electrogalvanized

Master data

Item number	3497706
Type	PBD i M12
Description 1	Aerated concrete anchor
Description 2	with internal thread
Manufacturer	OBO
Dimension	92x16
Material	Steel
Surface	Electrogalvanized
Surface standard	EN ISO 19598 / EN ISO 4042
Smallest sales unit	25
Unit of quantity	Piece
Weight	8.9 kg
Weight unit	kg/100 pc.

Dimensions

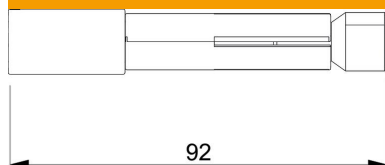

Length	92 mm
Dimension L	92 mm

Technical data sheet

Porous concrete anchor with M12 internal thread

Item number: 3497706



Technical data

Version for	For knocking in
Thread	M12
Thread metric	12
Thread type	Metric
Thread length	35 mm