

Technical data sheet

Metal installation duct, for outdoor applications

Item number: 7216401



Metal installation duct with intumescent fire protection mesh. Prevents the spread of fire and protects against the impacts of a cable fire. Fire resistance up to 90 minutes. With the corresponding fittings, it is possible to overcome obstacles in outdoor areas. Suitable for mounting on FangFix concrete blocks. Can be used as a special solution in the routing of cables over firewalls according to the surveyor's report GA-2021/047a. Solution according to EltAnlagen 2020 of BMI+AMEV. Only approved pre-terminated fittings may be used.

Including screws to fasten the duct cover.


Use of the duct with photovoltaics cables over firewalls may need to be agreed with the relevant authority.

A2 Stainless steel

Master data

Item number	7216401
Type	PLMR 1025 A2
Description 1	Installation duct metal
Description 2	for outdoor applications
Manufacturer	OBO
Dimension	2000x250x100
Material	Stainless steel
Smallest sales unit	2
Unit of quantity	Metre
Weight	750 kg
Weight unit	kg/100 m

Dimensions

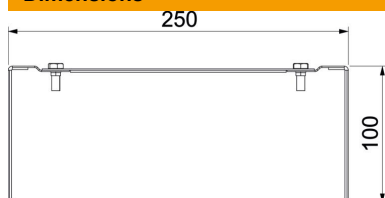

Length	2,000 mm
Width	250 mm
Height	100 mm
Dimension B	250 mm
Dimension H	100 mm
Dimension i	160 mm

Technical data sheet

Metal installation duct, for outdoor applications

Item number: 7216401



Technical data

Number of flammable sides	3
Cover fastening	Miscellaneous
With perforation	no
Partitions possible	no
Jacketing	Steel
Material of the insulation	Miscellaneous