Technical data sheet

Internal corner, duct height 40 mm, pure white





Internal corner with intumescent fire protection mesh for PYROLINE® Rapid PLM installation duct. Suitable for direct wall and ceiling mounting, mounting below system floors and on support systems. Tool-free joint mounting with PLM SI joint connector. The cover is snapped on without tools, allowing rapid inspection and retroassignment. The cover overhang allows offset cover mounting for continuous equipotential bonding of the entire duct section.



CE

St

Steel

P

Powder-coated

Master data


Item number	7218052
Туре	PLM IC 0410 RW
Description 1	Internal corner
Description 2	with fire protection mesh
Manufacturer	OBO
Dimension	290x100x290
Colour	Pure white; RAL 9010
Material	Steel
Surface	Powder-coated
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	116 kg
Weight unit	kg/100 pc.

Technical data sheet

Internal corner, duct height 40 mm, pure white



Item number: 7218052

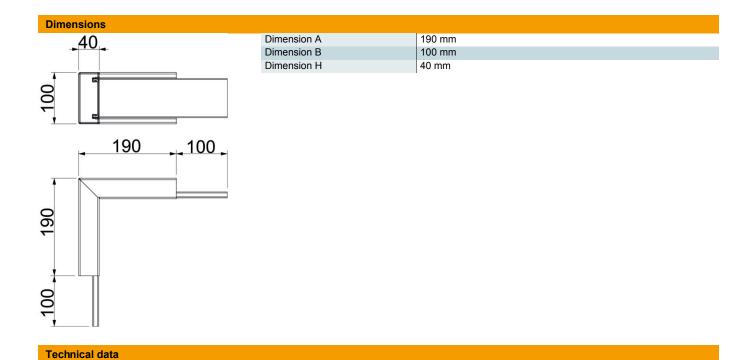

Miscellaneous

1780 mm²

yes

no

Steel

90°

Number of flammable sides

Cover fastening

With perforation

Jacketing

Usable cross-section

Partitions possible

Angle of the bend