Technical data sheet

Wall connection collar, 3- and 4-sided, duct height 40 mm, FS

Item number: 7218122





Wall connection collar, 4-sided, with integrated seal for PYROLINE® Rapid PLM installation duct. For mounting in the area of wall and ceiling connections as well as wall penetrations. Can also be used as 3-sided wall connection collar for direct wall or ceiling mounting of the duct.

 ϵ

St

Steel

FS

Strip galvanized

Master data

| Item number | 7218122 | |
|---------------------|------------------------|--|
| Туре | PLM WC 0410 FS | |
| Description 1 | Wall connection collar | |
| Description 2 | 3- and 4-sided | |
| Manufacturer | OBO | |
| Dimension | 85x253x193 | |
| Material | Steel | |
| Surface | Strip galvanized | |
| Surface standard | DIN EN 10346 | |
| Smallest sales unit | 1 | |
| Unit of quantity | Piece | |
| Weight | 55.3 kg | |
| Weight unit | kg/100 pc. | |


Technical data sheet

0

Wall connection collar, 3- and 4-sided, duct height 40 mm, FS



Item number: 7218122

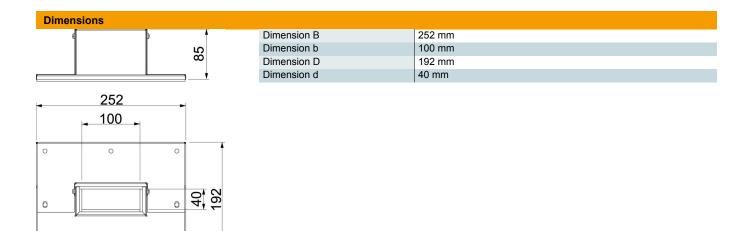

| | hn | | | |
|--|----|--|--|--|
| | | | | |
| | | | | |

| | Type of accessory | Wall connection collar |
|--|-------------------|------------------------|
| | Accessories | yes |
| | Spare part | no |