

# Technical data sheet

Wall connection collar, 3- and 4-sided, duct height 40 mm,  
pure white

Item number: 7218124



Wall connection collar, 4-sided, with integrated seal for PYROLINE® Rapid PLM installation duct. For mounting in the area of wall and ceiling connections as well as wall penetrations. Can also be used as 3-sided wall connection collar for direct wall or ceiling mounting of the duct.



**St** Steel

**P** Powder-coated

## Master data

|                     |                        |
|---------------------|------------------------|
| Item number         | 7218124                |
| Type                | PLM WC 0410 RW         |
| Description 1       | Wall connection collar |
| Description 2       | 3- and 4-sided         |
| Manufacturer        | OBO                    |
| Dimension           | 85x253x193             |
| Colour              | Pure white; RAL 9010   |
| Material            | Steel                  |
| Surface             | Powder-coated          |
| Surface standard    |                        |
| Smallest sales unit | 1                      |
| Unit of quantity    | Piece                  |
| Weight              | 55.3 kg                |
| Weight unit         | kg/100 pc.             |


# Technical data sheet

Wall connection collar, 3- and 4-sided, duct height 40 mm,  
pure white

Item number: 7218124



## Dimensions

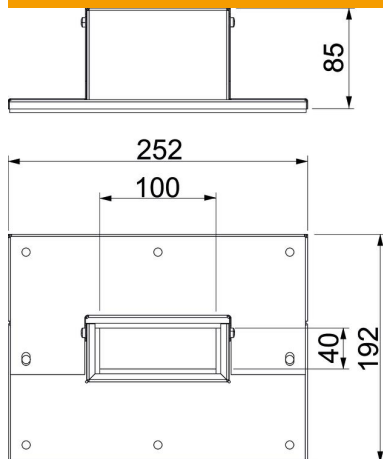

|             |        |
|-------------|--------|
| Dimension B | 252 mm |
| Dimension b | 100 mm |
| Dimension D | 192 mm |
| Dimension d | 40 mm  |

## Technical data

|                   |                        |
|-------------------|------------------------|
| Type of accessory | Wall connection collar |
| Accessories       | yes                    |
| Spare part        | no                     |