


Technical data sheet

Cassette kit for screed installation

Item number: 7429556

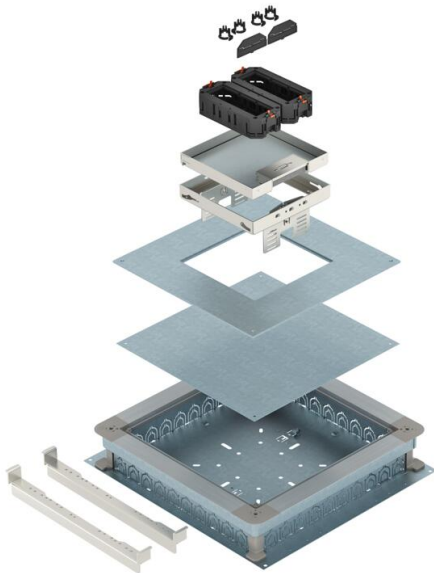

Height-adjustable cassette with cord outlet with all necessary system accessories for direct installation in screed floors with dry-care floor covering for indoor use.

The scope of delivery contains:

- Underfloor box UGD350-3R,
- Mounting lid DUG350-3/4,
- Height adjustment bracket
- Cassette of nominal size 4 with cord outlet,
- Two UT3/45 universal supports, each for three Modul 45® devices. Stainless cassette and cord outlet. 20 mm floor covering recess in the cassette.



A2 Stainless steel

Master data

Item number	7429556
Type	RKSN2 4 KSD V20
Description 1	Cassette construction set
Description 2	for screed installation
Manufacturer	OBO
Material	Stainless steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	164.18 kg
Weight unit	kg/100 pc.

Technical data

Cable outlet version	Swivellable cord outlet
Screed height, max.	125 mm
Screed height, min.	70 mm
Protection rating (IP) when used	IP20
Protection rating (IP) when unused	IP40
Protection rating IK code	IK10
Floor covering thickness	20 mm