


# Technical data sheet

## T piece 110 FT

Item number: 6038326



T piece for the creation of a horizontal branch, fitting for lock and screw-on cable trays of side height 110 mm. Screwless mounting with double clamps or screw connection with FRS truss-head screws and M6 combination nuts. Can be used indoors and outdoors. Fastening material must be ordered separately.

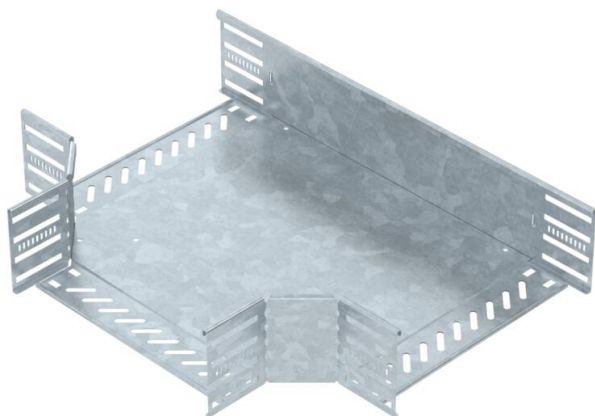

**St** Steel

**FT** Hot-dip galvanised

### Master data

|                     |                            |
|---------------------|----------------------------|
| Item number         | 6038326                    |
| Type                | RT 130 FT                  |
| Description 1       | T piece                    |
| Description 2       | for cable tray, horizontal |
| Manufacturer        | OBO                        |
| Dimension           | 110x300                    |
| Material            | Steel                      |
| Surface             | Hot-dip galvanised         |
| Surface standard    | DIN EN ISO 1461            |
| Smallest sales unit | 1                          |
| Unit of quantity    | Piece                      |
| Weight              | 268.9 kg                   |
| Weight unit         | kg/100 pc.                 |


# Technical data sheet

## T piece 110 FT

Item number: 6038326



### Dimensions

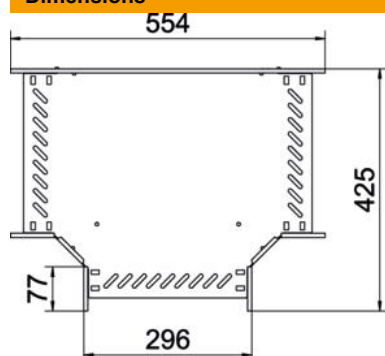

|                 |        |
|-----------------|--------|
| Width           | 300 mm |
| Height          | 110 mm |
| Plate thickness | 1 mm   |
| Dimension B     | 300 mm |

### Technical data

|   |                      |
|---|----------------------|
| Connector version                       | Integrated connector |
| Maintain electrical functions           | no                   |
| NATO hole pattern                       | no                   |
| Rustproof steel, pickled                | no                   |
| Permitted temperature range, max.       | 120 °C               |
| Permitted temperature range, min.       | -20 °C               |
| Wide-span version                       | no                   |
| Type of connector, cable support system | screwed/clamped      |
| Recommended quantity of bolts           | 33 St.               |
| Rail thickness                          | 1.25 mm              |