# **Technical data sheet**

## 90° bend with trapezoidal rung, SG

**Item number: 7098731** 



 $90^\circ$  bend for shipbuilding cable ladders, type SL 62, with side height of 40 mm with welded, perforated trapezoidal rungs which open in a downwards direction. Connectors should be ordered separately and in the appropriate quantity.





St

Steel

SG

Welding primed

### Master data


Item number 7098731 Type SLB 90 62 300 SG Description 1 90° bend Description 2 with trapezoidal rung Manufacturer OBO Dimension B310mm Material Steel Surface Welding primed Surface standard Smallest sales unit 1 Unit of quantity Piece Weight 311 kg		
Description 1 90° bend Description 2 with trapezoidal rung Manufacturer OBO Dimension B310mm Material Steel Surface Welding primed Surface standard Smallest sales unit 1 Unit of quantity Piece	Item number	7098731
Description 2 with trapezoidal rung  Manufacturer OBO  Dimension B310mm  Material Steel  Surface Welding primed  Surface standard  Smallest sales unit 1  Unit of quantity Piece	Туре	SLB 90 62 300 SG
Manufacturer OBO Dimension B310mm Material Steel Surface Welding primed Surface standard Smallest sales unit 1 Unit of quantity Piece	Description 1	90° bend
Dimension  Material  Steel  Surface  Surface standard  Smallest sales unit  Unit of quantity  B310mm  Steel  Welding primed  1  Unit of quantity  Piece	Description 2	with trapezoidal rung
Material Steel Surface Welding primed Surface standard Smallest sales unit 1 Unit of quantity Piece	Manufacturer	OBO
Surface Welding primed Surface standard Smallest sales unit 1 Unit of quantity Piece	Dimension	B310mm
Surface standard Smallest sales unit Unit of quantity Piece	Material	Steel
Smallest sales unit 1 Unit of quantity Piece	Surface	Welding primed
Unit of quantity Piece	Surface standard	
, ,	Smallest sales unit	1
Weight 311 kg	Unit of quantity	Piece
	Weight	311 kg
Weight unit kg/100 pc.	Weight unit	kg/100 pc.

# **Technical data sheet**

# 90° bend with trapezoidal rung, SG





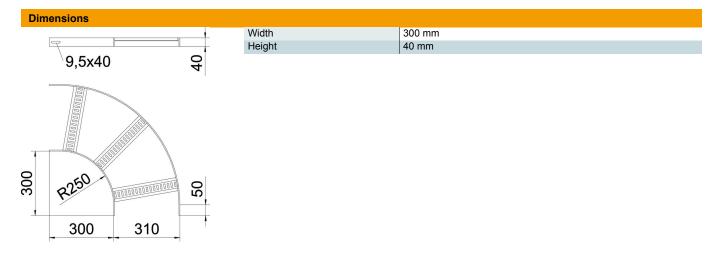

Tec			

Bend (angle)	90°
Version of the rungs	Profile perforated
Side rail version	Flat profile
Connector version	Without connectors
Maintain electrical functions	no
Change of direction	Horizontal
Rustproof steel, pickled	no
Hinged	no
Side perforation	no
Wide-span version	no
Rail thickness	5 mm