

Technical data sheet

Cable ladder SLCS 110, 3 m C30 FT SOMY

Item number: 7186404



Cable ladder with 110 mm side height with welded C30 profile rungs which are open in an upwards direction. Rolled side rail for reinforcement and as edge protection. Fastening to the bracket takes place using clamps, type LKS 40. The slot dimension of the frame is 16.5 mm and the appropriate U clamp clip is type 2056.

Magnetic shield insulation without cover 10 dB, with cover 15 dB.



St Steel

**FT
SO** Hot-dip galvanised 85 µm

Master data

Item number	7186404
Type	SLCS 1140 3 FTSO
Description 1	Cable ladder
Description 2	unperforated rung, welded
Manufacturer	OBO
Dimension	110x400x3000
Material	Steel
Surface	Hot-dip galvanised 85 µm
Surface standard	DIN EN ISO 1461
Smallest sales unit	30
Unit of quantity	Metre
Weight	606.07 kg
Weight unit	kg/100 m


Technical data sheet

Cable ladder SLCS 110, 3 m C30 FT SOMY

Item number: 7186404



Dimensions

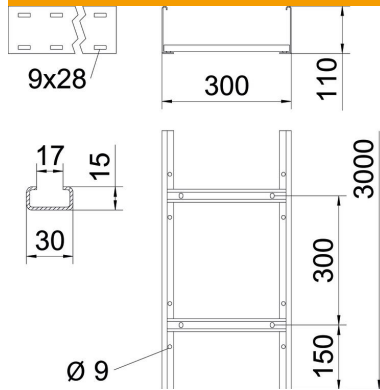


Length	3,000 mm
Length	3,000 ft
Width	400 mm
Height	110 mm
Dimension B	400 mm
Rung slot dimension	17.00

Technical data

Maintain electrical functions	no
Usable cross-section	360 cm ²
Usable cross-section	36000 mm ²
Rustproof steel, pickled	no
Side perforation	yes
Rung distance	300 mm
Wide-span version	no
Rail thickness	2 mm

Loads

Support spacing 2.0 m	4 kN/m
Support spacing 3.0 m	2.3 kN/m
Support spacing 4.0 m	1 kN/m
Support spacing 5.0 m	0.7 kN/m
Support spacing 6.0 m	0.25 kN/m

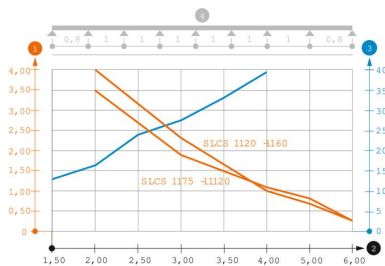

Load diagram, cable ladder, type SLCS 110

- 1 Permitted cable tray/ladder load in kN/m without man load
 - 2 Support width in m
 - 3 Rail bend in mm at permitted kN/m
 - 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
 - Strut bend curve according to support width