

Technical data sheet

Vertical ladder, SLM50

Item number: 6010016



Heavyweight vertical ladder system for the maintenance of electrical function to DIN 4102 Part 12. Approved clips, type BS-U1-M-... FT. Supplied unmounted. Rungs, type C 40/..., and bolts, type FRS 8 x 35, are supplied unmounted with rail profiles. Rung distance: 300 mm

- St** Steel
- FT** Hot-dip galvanised

Master data

| | |
|---------------------|----------------------|
| Item number | 6010016 |
| Type | SLM50C40F 50 FT |
| Description 1 | Vertical ladder |
| Description 2 | rung distance 300 mm |
| Manufacturer | OBO |
| Dimension | 500x3000mm |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 3 |
| Unit of quantity | Metre |
| Weight | 793.333 kg |
| Weight unit | kg/100 m |


Technical data sheet

Vertical ladder, SLM50

Item number: 6010016



Dimensions

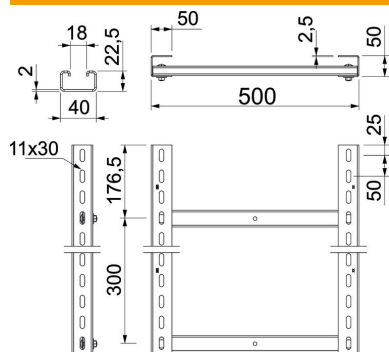

| | |
|---------------------|----------|
| Length | 3,000 mm |
| Width | 500 mm |
| Height | 50 mm |
| Dimension B | 500 mm |
| Rung slot dimension | 2.00 |

Technical data

| | |
|-------------------------------|----------------------|
| Side wall version | Profile (open) |
| Version of the rungs | Profile unperforated |
| Maintain electrical functions | yes |
| Rustproof steel, pickled | no |
| Side perforation | yes |
| Rung distance | 300 mm |