

# Technical data sheet


## 33° socket, protective contact, triple

Item number: 6120129



Protective contact socket triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

For installation in Rapid 45 ducts, device installation ducts, installation columns, underfloor systems and Deskboxes.

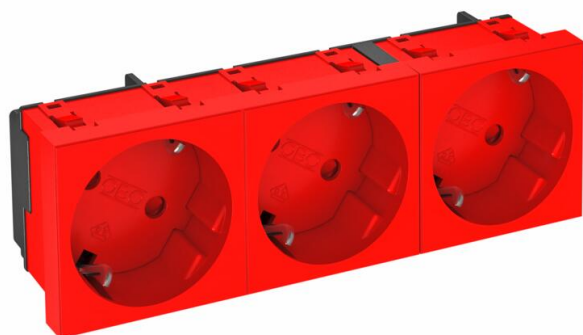

PC Polycarbonate

### Master data

|                     |                      |
|---------------------|----------------------|
| Item number         | 6120129              |
| Type                | STD-D3S SRO3         |
| Description 1       | Socket 33°, triple   |
| Description 2       | protective contact   |
| Manufacturer        | OBO                  |
| Dimension           | 250V, 10/16A         |
| Colour              | Signal red; RAL 3001 |
| Material            | Polycarbonate        |
| Smallest sales unit | 1                    |
| Unit of quantity    | Piece                |
| Weight              | 11 kg                |
| Weight unit         | kg/100 pc.           |

# Technical data sheet

33° socket, protective contact, triple

Item number: 6120129



## Dimensions

|        |        |
|--------|--------|
| Width  | 135 mm |
| Height | 45 mm  |



## Technical data

|  |                              |
|--|------------------------------|
| Cover  | Central plate                |
| Closable   | no                           |
| Connection type                                  | Screwless terminal           |
| Number of units                                  | 3                            |
| Number of modules (for modular construction)     | 0                            |
| Number of switchable sockets                     | 0                            |
| Number of poles                                  | 2                            |
| Printed label/coding                             | Without printing             |
| Version for                                      | triple 33°                   |
| Surface version                                  | Matt                         |
| Version for                                      | SCHUKO                       |
| Ejection mechanism                               | no                           |
| Fastening type                                   | Lock                         |
| Labelling panel                                  | no                           |
| Operating temperature, max.                      | 40 °C                        |
| Operating temperature, min.                      | -5 °C                        |
| increased touch protection                       | yes                          |
| Error current protection                         | no                           |
| For more difficult conditions (according to VDE) | no                           |
| Halogen-free                                     | yes                          |
| Insulated installation                           | no                           |
| Hinged cover                                     | no                           |
| Coding   | no                           |
| Warning light                                    | no                           |
| With on/off switch                               | no                           |
| With fine-wire fuse                              | no                           |
| With functional lighting                         | no                           |
| With orientation lighting                        | no                           |
| Mounting type                                    | Device installation duct     |
| Nominal voltage                                  | 250 V                        |
| Nominal current                                  | 16 A                         |
| Protection rating                                | Other                        |
| Special power supply                             | Without special power supply |
| Socket version                                   | Protective contact           |
| Socket angle                                     | 33°                          |
| Depth  | 42 mm                        |
| Transparent                                      | no                           |
| Rotated central insert                           | yes                          |
| Approvals  | VDE                          |
| Surge protection                                 | no                           |