

# Technical data sheet

## 33° socket, with earthing pin, triple

Item number: 6120262



Socket with earthing pin Triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250V ~, with connection terminals to IEC 60884-1.

For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.



PC Polycarbonate

### Master data

|                     |                      |
|---------------------|----------------------|
| Item number         | 6120262              |
| Type                | STD-F3 RW3           |
| Description 1       | Socket 33°, triple   |
| Description 2       | with earth pin       |
| Manufacturer        | OBO                  |
| Dimension           | 250V, 10/16A         |
| Colour              | Pure white; RAL 9010 |
| Material            | Polycarbonate        |
| Smallest sales unit | 1                    |
| Unit of quantity    | Piece                |
| Weight              | 10.5 kg              |
| Weight unit         | kg/100 pc.           |


# Technical data sheet

33° socket, with earthing pin, triple


Item number: 6120262



## Dimensions



|        |        |
|--------|--------|
| Width  | 135 mm |
| Height | 45 mm  |

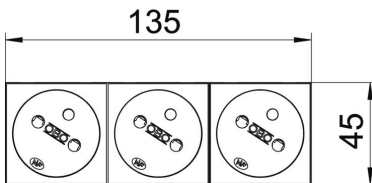

## Technical data

|  |                              |
|--|------------------------------|
| Cover  | Central plate                |
| Closable   | no                           |
| Connection type                                  | Screwless terminal           |
| Number of units                                  | 3                            |
| Number of modules (for modular construction)     | 3                            |
| Number of switchable sockets                     | 0                            |
| Number of poles                                  | 2                            |
| Printed label/coding                             | Without printing             |
| Version for                                      | Triple 33°                   |
| Surface version                                  | Matt                         |
| Version for                                      | Protective contact pin       |
| Ejection mechanism                               | no                           |
| Fastening type                                   | Lock                         |
| Labelling panel                                  | no                           |
| Operating temperature, max.                      | 40 °C                        |
| Operating temperature, min.                      | -5 °C                        |
| increased touch protection                       | yes                          |
| Error current protection                         | no                           |
| For more difficult conditions (according to VDE) | no                           |
| Halogen-free                                     | yes                          |
| Insulated installation                           | no                           |
| Hinged cover                                     | no                           |
| Coding   | no                           |
| Warning light                                    | no                           |
| With on/off switch                               | no                           |
| With fine-wire fuse                              | no                           |
| With functional lighting                         | no                           |
| With orientation lighting                        | no                           |
| Mounting type                                    | Device installation duct     |
| Nominal voltage                                  | 250 V                        |
| Nominal current                                  | 16 A                         |
| Protection rating                                | Other                        |
| Special power supply                             | Without special power supply |
| Socket version                                   | NF                           |

# Technical data sheet

33° socket, with earthing pin, triple

Item number: 6120262



## Technical data

|                        |       |
|------------------------|-------|
| Socket angle           | 33°   |
| Depth                  | 39 mm |
| Transparent            | no    |
| Rotated central insert | yes   |
| Approvals              | VDE   |
| Surge protection       | no    |