

Technical data sheet

Service outlet with hinged cover and locking slider,
GES R2, old copper
Item no. 7408854



Service outlet with hinged cover and locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket.
When closed, the floor socket can be wet-cleaned.




Zn	Die-cast zinc
Cu	Copper-plated

Master data

Item no.	7408854
Type	GES R2 Cu
Description 1	Floor socket
Description 2	with hinged cover
Material	Die-cast zinc
Material symbol	Zn
Surface	Copper-plated
Surface symbol	Cu
Smallest sales unit (VG)	1 Piece
Weight	58,50 kg/100 pc.

Technical data

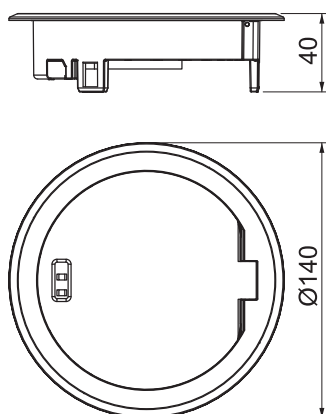

External diameter	140,00 mm
Cable outlet version	Swivellable cord outlet
Floor covering protection frame	☒
Floor care	Wet
Version for	Round
Installation depth	85,00 mm
Suitable for wet care	☒
Suitable for raised floor installation	☒
Suitable for cavity floor installation	☒
Suitable for underfloor ducts	☐
With floor covering recess	☐
Standard	EN 50085-2-2
Opening mechanism	Locking slider
Protection rating (IP) when used	IP20
Protection rating (IP) when unused	IP66
Protection rating IK code	IK10
Approvals	
Vertical load, small area	to 3,000 N
Vertical load, large area	to 15,000 N