


Technical data sheet

UDHOME2 floor socket, with tube body, freely
equippable, stainless steel
Item no. 7427095

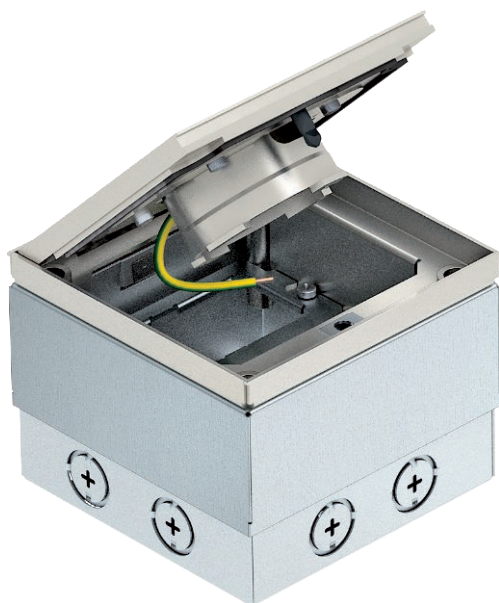

Square floor socket for use in wet-care cavity and screed floors for indoor use. Installation housing with pre-marked insertion openings for empty pipelines (M20/M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.

Up to two Modul 45® sockets can be installed. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.




A2 Stainless steel, rustproof

Master data

Item no.	7427095
Type	UDHOME2 VF
Description 1	Floor socket, complete
Description 2	with tube, empty for 2 Modul46
Dimension	140x140x110
Material	Stainless steel, material A2
Material symbol	A2
Smallest sales unit (VG)	1 Piece
Weight	315,00 kg/100 pc.

Technical data

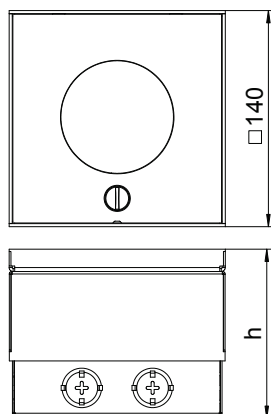

Length	140,00 mm
Width	140,00 mm
Dimension h	110,00 mm
Wide external dimensions	140,00 mm
Wide installation dimensions	140,00 mm
Length of external dimensions	140,00 mm
Length of installation dimensions	140,00 mm
Number of mounting boxes	0
Cable outlet version	Lowerable tube body
Floor covering protection frame	☐
Floor care	Wet
Version for	Square
Seal installation option	☒
Installation depth	110,00 mm
Floor height	110-130 mm
Device support to accept mounting boxes	☐
Suitable for wet care	☒
Suitable for raised floor installation	☒
Suitable for cavity floor installation	☒
Suitable for underfloor ducts	☒

Technical data sheet

UDHOME2 floor socket, with tube body, freely
equippable, stainless steel
Item no. 7427095



Technical data

With floor covering recess	☐
Opening mechanism	Turn buckle
Protection rating (IP) when unused	IP45