

Technical data sheet

US 3 support FS

Item number: 6342328



U support in fixed lengths. Dimensions 30 x 50 mm.
For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.



St Steel

FS Strip galvanized

Master data

| | |
|---------------------|--------------------|
| Item number | 6342328 |
| Type | US 3 150 FS |
| Description 1 | U support |
| Description 2 | 3-sided perforated |
| Manufacturer | OBO |
| Dimension | 50x30x1500 |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 200 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

US 3 support FS

Item number: 6342328



Dimensions

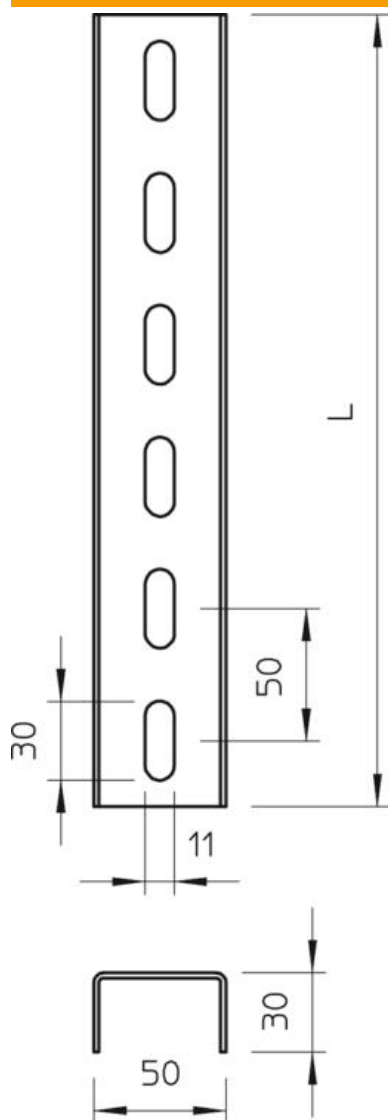

| | |
|-------------|---------------|
| Dimension | 30 x 50 x 2,0 |
| Length | 1,500 mm |
| Width | 50 mm |
| Height | 30 mm |
| Dimension L | 1,500 mm |

Technical data

| | |
|-------------------------------|--------------------|
| Breakable | no |
| Type of perforation | 3 sides perforated |
| Version for | Single profile |
| Maintain electrical functions | yes |
| Hole width | 11 mm |
| Material thickness | 2 mm |
| With tothing | no |

Technical data sheet

US 3 support FS

Item number: 6342328



Technical data

| | |
|-----------------------------|----------------------|
| Profile shape | U profile |
| Slot width | 30 mm |
| Static value A | 1.42 cm ² |
| Static value I _y | 1.52 cm |
| Static value I _z | 5.72 cm |
| Static value W _y | 0.7 cm ² |
| Static value W _z | 2.29 cm ² |