

# Technical data sheet

## US 3 support FS

Item number: 6342345



U support in fixed lengths. Dimensions 30 x 50 mm.  
For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.

CE

**St** Steel

**FS** Strip galvanized

### Master data

Item number	6342345
Type	US 3 600 FS
Description 1	U support
Description 2	3-sided perforated
Manufacturer	OBO
Dimension	50x30x6000
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	1
Unit of quantity	Piece
Weight	798 kg
Weight unit	kg/100 pc.


# Technical data sheet

## US 3 support FS

Item number: 6342345



### Dimensions

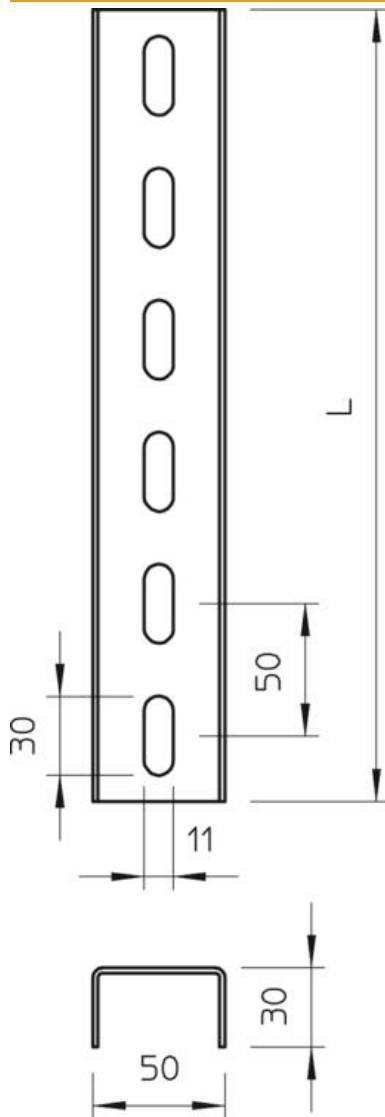

Dimension	30 x 50 x 2,0
Length	6,000 mm
Width	50 mm
Height	30 mm
Dimension L	6,000 mm

### Technical data

Breakable	no
Type of perforation	3 sides perforated
Version for	Single profile
Maintain electrical functions	no
Hole width	11 mm
Material thickness	2 mm
With tothing	no

# Technical data sheet

US 3 support FS

Item number: 6342345



## Technical data

Profile shape	U profile
Slot width	30 mm
Static value A	1.42 cm <sup>2</sup>
Static value I <sub>y</sub>	1.52 cm
Static value I <sub>z</sub>	5.72 cm
Static value W <sub>y</sub>	0.7 cm <sup>2</sup>
Static value W <sub>z</sub>	2.29 cm <sup>2</sup>