Technical data sheet US 5 support A4

Item number: 6341241





Suspended support (U profile) with welded head plate. For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 45.




2B Bright, treated

Master data

6341241
US 5 K 100 A4
Support
with welded head plate
OBO
50x50x1000
Stainless steel
Bright, treated
1
Piece
300 kg
kg/100 pc.

Item number: 6341241



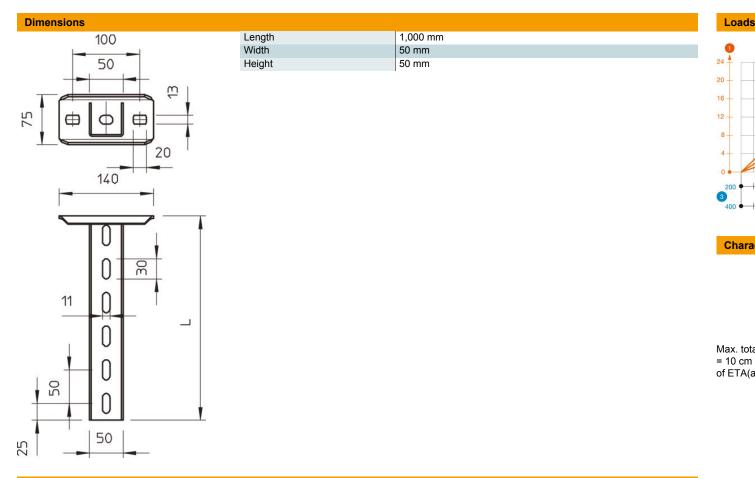

Technical data

Version for	U profile
Bracket length 200	5.75 kN
Bracket length 400	3.1 kN
Bracket length 600	2.2 kN
Maintain electrical functions	no
Material thickness	2.5 mm
Maximum tensile load	10 kN