

Technical data sheet

US 7 support FT

Item number: 6339212



Suspended support (U profile) of dimensions 70 x 50 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 61.



St Steel

FT Hot-dip galvanised

Master data

| | |
|---------------------|------------------------|
| Item number | 6339212 |
| Type | US 7 K 130 FT |
| Description 1 | Support |
| Description 2 | with welded head plate |
| Manufacturer | OBO |
| Dimension | 70x50x1300 |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 636 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

US 7 support FT

Item number: 6339212




Dimensions

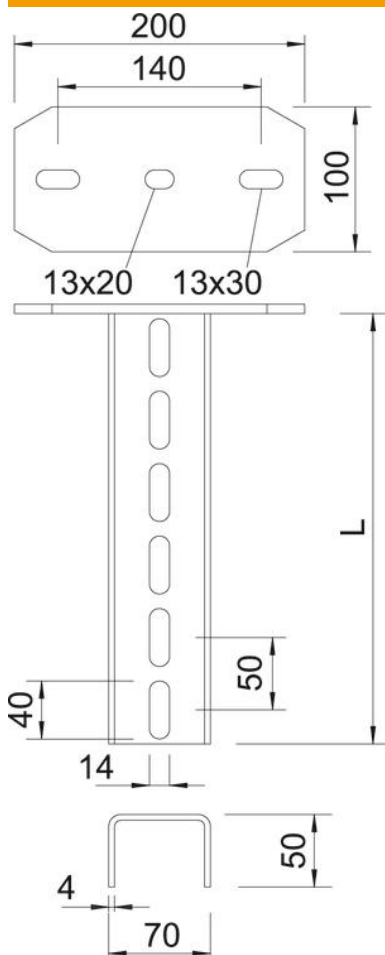

| | |
|-------------|----------|
| Length | 1,300 mm |
| Width | 70 mm |
| Height | 50 mm |
| Dimension L | 1,300 mm |

Loads



Chara

Max. total
= 10 cm
of ETA(a)

Technical data

| | |
|-------------------------------|-----------|
| Version for | U profile |
| Bracket length 200 | 8.3 kN |
| Bracket length 400 | 5 kN |
| Bracket length 600 | 3.5 kN |
| Maintain electrical functions | yes |
| Material thickness | 4 mm |
| Maximum tensile load | 11 kN |