


Technical data sheet

UZD350-3 with pipe entry for screed height 70–125 mm

Item number: 7410035

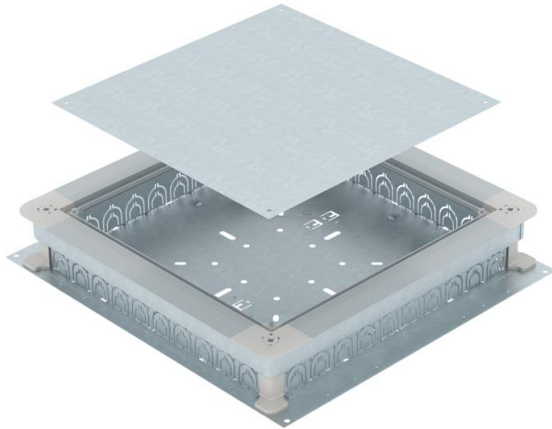

Underfloor junction and branch box for 10 installation pipes on each side (M20 or M32) with sheet steel side walls. To mount installation units in the mounting lid (to be ordered separately). Height can be infinitely adjusted to the nominal screed height (rapid adjustment possible) and the screed can be worked flush to the screed scraping edge. With noise decoupling option after screed laying and can be used with system accessories, also for heavy-duty application.



- St** Steel
- FS** Strip galvanized

Master data

| | |
|---------------------|----------------------------|
| Item number | 7410035 |
| Type | UZD 350-3 R |
| Description 1 | Junction and branch box |
| Description 2 | for screed height 70-125mm |
| Manufacturer | OBO |
| Dimension | 510x467x70 |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 590 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

UZD350-3 with pipe entry for screed height 70–125 mm

Item number: 7410035



Dimensions

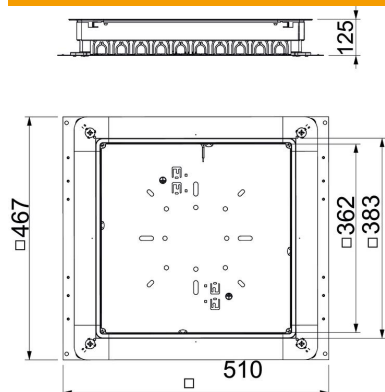

| | |
|-------------|--------|
| Dimension a | 362 mm |
| Dimension A | 467 mm |
| Dimension B | 510 mm |
| Dimension b | 383 mm |

Technical data

| | |
|---|-----------|
| Floor plate | yes |
| Lowerable to be flush-floor | yes |
| Cover version | Universal |
| Seal installation option | yes |
| Installation opening for on-floor tank | no |
| Decouplable | yes |
| Screed height, max. | 125 mm |
| Screed height, min. | 70 mm |
| For pipe connection | yes |
| Suitable for screed-flush closed underfloor ducts | no |
| Suitable for screed-covered underfloor ducts | no |
| Suitable for underfloor ducts | no |
| Minimum screed height | 70 |
| Nominal size | 350 mm |
| Height-adjustment range, max. | 125 mm |
| Height-adjustment range, min. | 70 mm |