## **Technical data sheet**

**Item number: 1123051** 

## MS4141 mounting rail, slot 22 mm, A4, perforated





Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.





Α4

Stainless steel

2E

Bright, treated

#### Master data


Item number	1123051
Туре	MS4141P6000A4
Description 1	Profile rail
Description 2	perforated, slot 22mm
Manufacturer	OBO
Dimension	6000x41x41
Material	Stainless steel
Surface	Bright, treated
Surface standard	
Smallest sales unit	6
Unit of quantity	Metre
Weight	247.5 kg
Weight unit	kg/100 m

# **Technical data sheet**

# MS4141 mounting rail, slot 22 mm, A4, perforated



Item number: 1123051

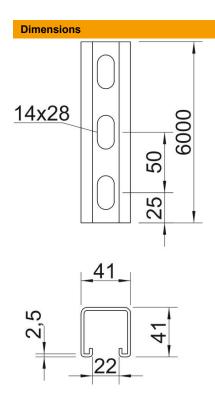

Length	6,000 mm
Width	41 mm
Height	41 mm
Dimension L	6,000 mm

### Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	no
Hole size	14x28 mm
Material thickness	2.5 mm
With toothing	yes
Profile shape	C profile
Slot width	22 mm
Static value A	2.97 cm <sup>2</sup>
Static value ly	6.05 cm
Static value Iz	9.01 cm
Static value Wy	2.91 cm <sup>2</sup>
Static value Wz	4.4 cm <sup>2</sup>