

Technical data sheet

MS4141 mounting rail, slot width 22 mm, FT, side perforation

Item number: 1123005



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



- St** Steel
- FT** Hot-dip galvanised

Master data

Item number	1123005
Type	MSL4141PP6000FT
Description 1	Profile rail
Description 2	perforated, slot 22mm
Manufacturer	OBO
Dimension	6000x41x41
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	6
Unit of quantity	Metre
Weight	191.5 kg
Weight unit	kg/100 m


Technical data sheet

MS4141 mounting rail, slot width 22 mm, FT, side perforation

Item number: 1123005



Dimensions

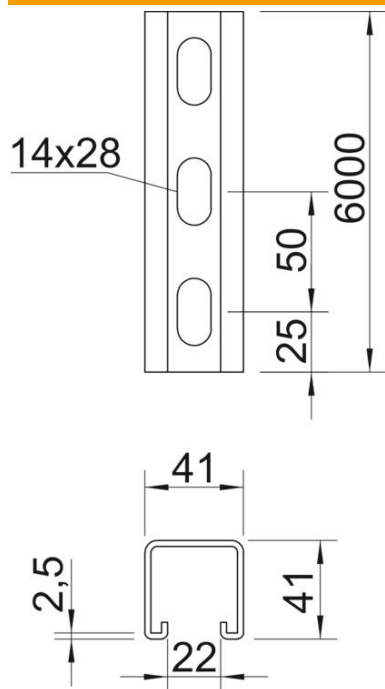

Length	6,000 mm
Width	41 mm
Height	41 mm
Dimension L	6,000 mm

Technical data

Breakable	no
Type of perforation	3 sides perforated
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	no
Hole size	14x28 mm
Material thickness	2 mm
With perforation	yes
With tothing	yes
Profile shape	C profile
Slot width	22 mm
Static value A	2.01 cm ²
Static value Iy	5.13 cm
Static value Iz	5.88 cm
Static value Wy	2.49 cm ²
Static value Wz	2.88 cm ²